



**HIGH ACCURACY**

m e a s u r e m e n t i n s t r u m e n t s

## PRODUCT DATASHEET

[www.high-accuracy.com](http://www.high-accuracy.com)

# Paine™ 211-37-520 Series Pressure Transducer

mV/V, Downhole, HP/HT, +204 °C, Ranges to 30,000 PSIA (2,068 BAR)



The Paine 11-37-520 Series is our High Pressure/High Temperature (HP/HT) combination transducer designed for 400 °F (204 °C) offshore oil, gas, and power industry requirements. The Paine 211-37-520 Series, based on its small size, all-welded construction, and ability to perform in corrosive environments, is the best solution for new downhole tool and process equipment design when temperatures are going to reach 400 °F (204 °C).

Many new exciting industries are now using the Paine 211-37-520 Series because of its rugged construction, accuracy, stability, and long term repeatability.

## Solutions

- High pressure and high temperature measurement
- All-welded, sealed construction
- Harsh/extreme environment ready

## Potential applications

- Wireline and rotary steering tools
- Hydraulic flow pressure and temperature monitoring
- Oil and gas exploration and production
- MWD, PWD, and LWD tools

## Features

- **Full Scale (F.S.) sensitivity:** 2.6 mV/V nominal
- **Total error band (non-linearity, hysteresis, and thermal effects):** ±0.75% F.S.
- **Output:** mV/V
- **Operating temperature:** -40 to +400 °F (-40 to +204 °C)
- **Pressure range:** 0-5,000 to 0-30,000 psia (344 to 2,068 bar)
- **Operating media:** Compatible with alloy UNS NO7718 solution annealed and aged to a minimum hardness of 40HRC.
- **Pressure fitting:** Per MS33656-E3

## Specifications

**Calibration:** Calibration certificates are supplied with each unit and available online.

### Performance

**Full Scale (F.S.) sensitivity:** 2.6 mV/V nominal

**Total error band (non-linearity, hysteresis, and thermal effects):** ±0.75% F.S.

**Non-linearity and hysteresis combined:** ±0.150% of F.S. maximum (BSLM)

**Output at zero pressure:** 0 ± 2.0% F.S.

**Platinum resistance temperature detector (RTD):** 0 °C, 1000 Ω ± 0.06% Ω to IEC 751, Class A, Alpha = 0.00385 nominal

**Sustained pressure/temperature stability:** When pressurized to F.S. pressure at 350 °F, F.S. output will not shift more than 0.05% F.S. in 14 days nor more than ± 0.07% F.S. in 60 days.

**Compensated:** This sensor compensated for temperature effects on signal.

### Environmental

**Environmental:** Error due to combined effect of shock, vibration and acceleration shall be less than 0.01% of F.S.O. per G.

**Operating temperature range:** -40 to +400 °F (-40 to +204 °C)

**Compensated temperature range:** +75 to +350 °F (+23 to +176 °C)

## Contents

Specifications ..... 2      Dimensional Drawings ..... 4

## Mechanical

**Pressure range:** Contact factory for additional pressure ranges.

**Table 1. Pressure Table**

| Standard part number | Pressure range PSIA (BAR) | Proof pressure PSIA (BAR) | Burst pressure PSIA (BAR) | Replaceable seal part number |
|----------------------|---------------------------|---------------------------|---------------------------|------------------------------|
| 211-37-520-01        | 0–5,000 (0–344)           | 7,500 (517)               | 10,000 (689)              | 247-99-250-01                |
| 211-37-520-02        | 0–10,000 (0–689)          | 15,000 (1,034)            | 20,000 (1,378)            | 247-99-250-01                |
| 211-37-520-03        | 0–15,000 (0–1034)         | 18,750 (1,292)            | 22,500 (1,551)            | 247-99-250-01                |
| 211-37-520-04        | 0–20,000 (0–1378)         | 25,000 (1,723)            | 30,000 (2,068)            | 247-99-250-01                |
| 211-37-520-05        | 0–22,500 (0–1551)         | 28,125 (1,939)            | 30,000 (2,068)            | 247-99-250-01                |
| 211-37-520-06        | 0–25,000 (0–1723)         | 31,250 (2,154)            | 33,000 (2,275)            | 247-99-250-01                |
| 211-37-520-07        | 0–30,000 (0–2068)         | 37,500 (2,585)            | 40,000 (2,757)            | 247-99-250-02                |

**External case pressure:** Up to 20,000 psi (1,378 bar)

**Pressure media:** Any compatible with alloy UNS NO7718 solution annealed and aged to a minimum hardness of 40HRC.

**Pressure fitting:** Per MS33656-E3

**Installation information:** Mount on port using annealed alloy 600 replaceable seal. Thermal coefficient of the mounting expansion should not exceed  $8.3 \times 10^{-6}$  in/in °F for operation above 100 °C.

**Recommended installation torque:** 125–150 in-lb (14–17 Nm)

## Electrical

**Excitation:** 1 to 20 VDC (10 VDC nominal)

**Input resistance:**  $1500 \pm 300 \Omega$


**Output resistance:**  $1500 \pm 150 \Omega$

**Insulation resistance:** All conductors together to case, 10 G $\Omega$  minimum at 50 VDC and +77 °F (+25 °C)

**Electrical connections:** High temperature solderable pins

# Dimensional Drawings

Figure 1. Paine 211-37-520 Series

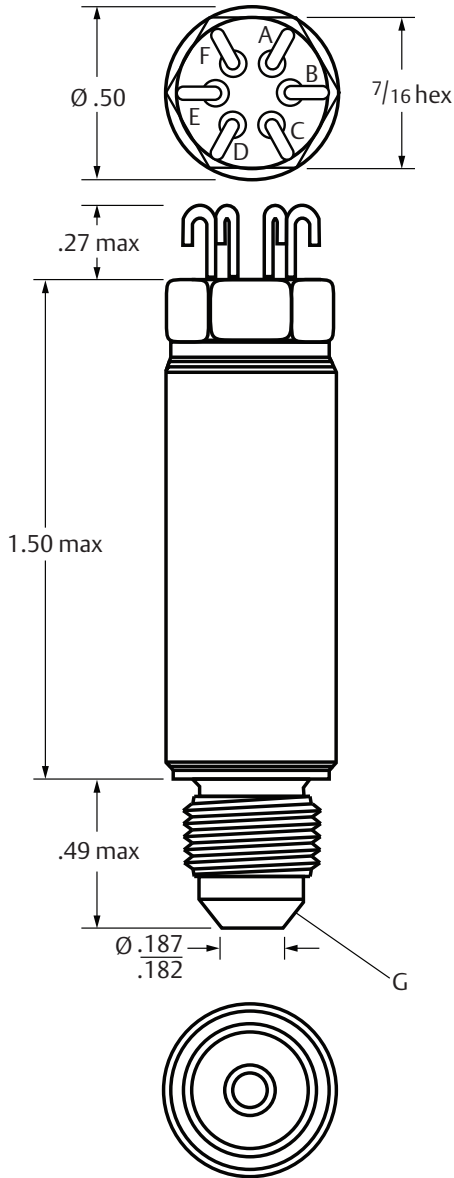

| Connections |              |
|-------------|--------------|
| PIN         | Function     |
| A           | + Excitation |
| B           | + Signal     |
| C           | - Signal     |
| D           | - Excitation |
| E           | R.T.D.       |
| F           | R.T.D.       |

A-F. See connections table  
 G. Fitting end per MS33656-E3  
 Dimensions are shown in inches.













This page is intentionally left blank.



# HIGH ACCURACY

measurement instruments

Our offering:

|   |  |  |                                    |
|---|--|--|------------------------------------|
|    | <p>Pressure<br/>Measurement</p>                    |    | <p>Level<br/>Measurement</p>       |
|   | <p>Temperature<br/>Measurement</p>                 |  | <p>Flow<br/>Measurement</p>        |
|  | <p>Marine<br/>Measurement &amp;<br/>Analytical</p> |  | <p>Gas<br/>Analysis</p>            |
|  | <p>Liquid<br/>Analysis</p>                         |  | <p>Flame and Gas<br/>Detection</p> |
|  | <p>Tank<br/>Gauging</p>                            |  | <p>Wireless<br/>Infrastructure</p> |
|  | <p>Acoustic<br/>&amp;<br/>Discrete</p>             |  |                                    |


[www.high-accuracy.com](http://www.high-accuracy.com)


**Rosemount Specialty Product LLC**


**Emerson Automation Solutions**


5545 Nelpar Drive

East Wenatchee, WA 98822, USA

 +1 509 881 2100


 +1 509 881 2115


 Paine.Products@Emerson.com

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://www.google.com/+RosemountMeasurement)

Standard Terms and Conditions of Sale can be found on the [Terms and Conditions of Sale page](#).

The Emerson logo is a trademark and service mark of Emerson Electric Co. The Paine brand and Paine logotype are trademarks of Emerson Electric Co. All other marks are the property of their respective owners.  
© 2017 Emerson. All rights reserved.