



**HIGH ACCURACY**  
measurement instruments

## PRODUCT DATASHEET

[www.high-accuracy.com](http://www.high-accuracy.com)

## Product Data Sheet

PS-001444, Rev. D  
April 2013

# Micro Motion® EtherNet/IP Module

Simplify integration of your Micro Motion® flowmeter into an EtherNet/IP control system with the Micro Motion EtherNet/IP Module.

The Micro Motion EtherNet/IP Module is a pre-configured interface between the serial output of a Micro Motion device and an EtherNet/IP network. It supports process monitoring and control, and browser-based configuration and administration.



### Current process data available for access via EtherNet/IP

- Pre-configured to deliver flow rates, flow totals, density, and more
- Supports both cyclic and acyclic data access strategies


### Browser-based configuration and administration

- Access to the most frequently used configuration settings
- Access to the most frequently used maintenance procedures

### Compatible with broad range of Micro Motion offerings

- Can be used with most Micro Motion transmitters and all Coriolis sensors
- Supports Micro Motion Smart Meter Verification

# Micro Motion® EtherNet/IP Module

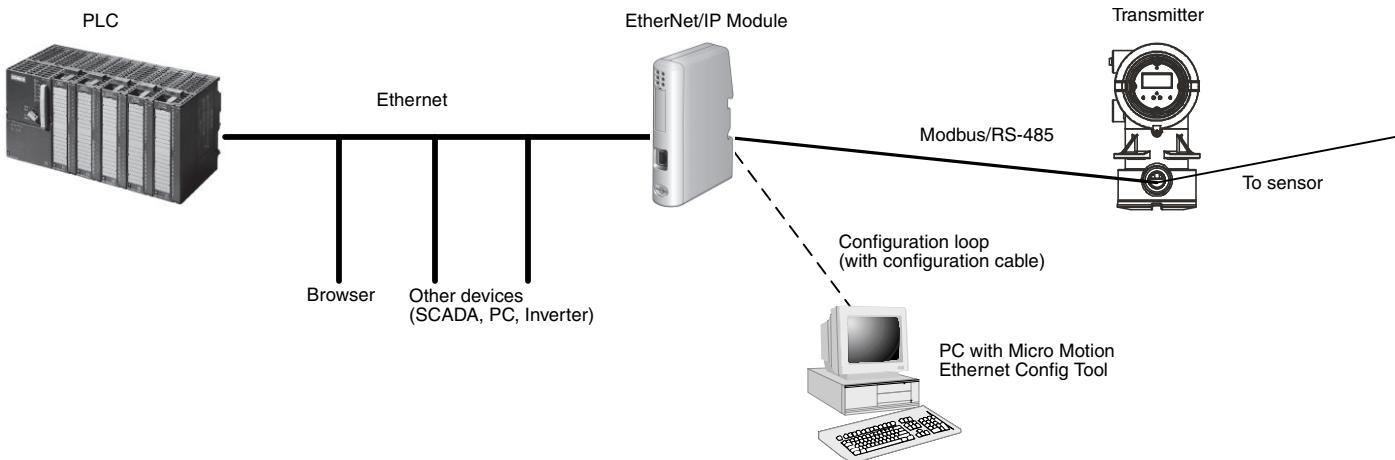

## Benefits

- Pre-configured to deliver simple, fast EtherNet/IP system integration
- Supports the full portfolio of Micro Motion Coriolis sensors
- Provides a retrofit EtherNet/IP solution for existing flowmeters
- Delivers installation flexibility
- Provides a convenient web interface for flowmeter configuration, management, and maintenance

## Supported transmitters

The EtherNet/IP Module is compatible with the following transmitters and devices:

- Model 1500 with analog outputs
- Model 1700 with analog outputs
- Model 2500 with configurable input/outputs
- Model 2700 with analog outputs
- 9739 MVD
- Micro Motion Direct Connect with Model 500 barrier (standard or enhanced core processor)
- Model 3500 and Model 3700 transmitters (Model 3300 and Model 3350 controllers are not supported)

*The Micro Motion EtherNet/IP Module is a customization of the Anybus® Communicator™ from HMS Industrial Networks. This data sheet provides information that is relevant to the Micro Motion implementation. For general platform information, see the HMS web site.*

## Contents

Benefits .....	2	Host interface .....	3
Supported transmitters .....	2	Configuration and maintenance .....	3
Supported process variables and applications ..	3	Security .....	3
Supported sensors .....	3	Specifications .....	4
Update rate .....	3	Ordering information .....	6

## Supported process variables and applications

Standard	Petroleum measurement application <sup>(1)</sup>	Concentration measurement application <sup>(1)</sup>
<ul style="list-style-type: none"><li>• Mass flow rate, total, and inventory</li><li>• Volume flow rate, total, and inventory (liquid)</li><li>• Gas standard volume flow rate, total, and inventory</li><li>• Density</li><li>• Temperature</li><li>• Pressure and external temperature (when available on the transmitter)</li></ul>	<ul style="list-style-type: none"><li>• Temperature-corrected density</li><li>• Temperature-corrected volume flow rate, total, and inventory</li><li>• Batch-weighted average density</li><li>• Batch-weighted average temperature</li><li>• CTL</li></ul>	<ul style="list-style-type: none"><li>• Density at reference</li><li>• Specific gravity</li><li>• Temperature-corrected volume flow rate, total, and inventory</li><li>• Net volume flow rate, total, and inventory</li><li>• Net mass flow rate, total, and inventory</li><li>• Concentration</li><li>• Baume</li></ul>

(1) Requires application installed on transmitter, and support files installed on Micro Motion EtherNet/IP Module.

## Supported sensors

The EtherNet/IP Module is compatible with all Coriolis flow and density sensors. All installation architectures (4-wire, 9-wire, integral, and direct connect) are supported.

## Update rate

The EtherNet/IP Module reads process variables from the transmitter at 5 Hz.

## Host interface

The EtherNet/IP Module is accessible over any ethernet network and is ODVA-certified for seamless interoperability with EtherNet/IP host systems. System integration is fast and easy using the Micro Motion EDS, downloaded directly from the device.

The process variables previously listed are supported as implicit parameters. Many additional parameters are available as explicit parameters.

The host can be programmed to perform various control and maintenance actions, such as totalizer reset and Smart Meter Verification.

## Configuration and maintenance

**Flowmeter.** Basic configuration for the Micro Motion flowmeter is supported via a web browser interface, accessible throughout the ethernet network.

Standard Micro Motion web pages are pre-loaded in the Micro Motion EtherNet/IP Module.

The standard Micro Motion web pages provide an interface to process data, and to process control and maintenance actions such as totalizer reset and sensor zero. The web pages also support operation of Micro Motion Smart Meter Verification.

**EtherNet/IP Module.** If custom configuration of the EtherNet/IP Module is required:

- Some configuration tasks can be performed through the standard Micro Motion web pages.
- The system supports access from a PC, using the Ethernet Config Tool software (provided with purchase) and a serial port connection
- FTP connections are supported, for loading the petroleum measurement or concentration measurement support files, and for access to platform features that are not used by the Micro Motion EtherNet/IP Module.

## Security

Two users are predefined for the Micro Motion web pages. The passwords can be changed, but adding or deleting users is not supported. The administrator password provides complete access to the Micro Motion web pages. The operator password provides read-only access. To access the web pages, one of these passwords must be supplied.

# Specifications

## Physical

---

<b>Housing</b>	Plastic housing with snap-on connection to DIN rail Protection class: IP20
<b>Dimensions</b>	4.72" x 2.95" x 1.06" LxWxH (120 mm x 75 mm x 27 mm)

---

## Electrical

---

<b>Power supply</b>	24 V ±10%	
<b>Power consumption</b>	Maximum	280 mA on 24 V
	Typical	100 mA

---

## Connections and protocols

---

<b>PLC to EtherNet/IP Module</b>	EtherNet/IP	Standard cable (not included) Standard connectors (not included)
<b>EtherNet/IP Module to transmitter</b>	Modbus RTU (8-bit) over RS-485	Standard cable (not included) Standard connector (included)
<b>Ethernet Config Tool (PC) to EtherNet/IP Module</b>	Serial	Custom cable (included)

---

## Environmental

---

<b>Relative humidity</b>	5 to 95% non-condensing	
<b>Temperature</b>	Operating	32 °F to 131 °F (0 °C to 55 °C)
	Ambient	-13 °F to +185 °F (-25 °C to +85 °C)

---

## Regulatory compliance

---

<b>EMC</b>	Complies with EMC directive 2004/108/EC			
	EN 61001-6-4 (2007)	Emission standard for industrial environment	EN 55016-2-3 (2006)	Class A
	EN 61000-6-2 (2005)	Immunity standard for industrial environment	EN 61000-4-2 (2009) EN 61000-4-3 (2006) EN 61000-4-4 (2004) EN 61000-4-5 (2005) EN 61000-4-6 (2007)	

**UL/c-UL** The certification has been documented by UL in file E214107.

---

## Galvanic isolation on Modbus serial interface

---

<b>EN 60950-1 (2001)</b>	Pollution Degree 2		
	Material Group IIIb		
	250 V <sub>RMS</sub> or 250 VDC	Working voltage	
	500 V		Secondary circuit transient rating

## Ordering information

To order, reference Model Code ETHERNETIPM on the spare accessory list.





# HIGH ACCURACY

measurement instruments

## Our offering:

	Pressure Measurement		Level Measurement
	Temperature Measurement		Flow Measurement
	Marine Measurement & Analytical		Gas Analysis
	Liquid Analysis		Flame and Gas Detection
	Tank Gauging		Wireless Infrastructure
	Acoustic & Discrete	 <b>HIGH ACCURACY</b> measurement instruments	

[www.high-accuracy.com](http://www.high-accuracy.com)

# Micro Motion—The undisputed leader in flow and density measurement



World-leading Micro Motion measurement solutions from Emerson Process Management deliver what you need most:

## Technology leadership

Micro Motion introduced the first reliable Coriolis meter in 1977. Since that time, our ongoing product development has enabled us to provide the highest performing measurement devices available.

## Product breadth

From compact, drainable process control to high flow rate fiscal transfer—look no further than Micro Motion for the widest range of measurement solutions.

## Unparalleled value

Benefit from expert phone, field, and application service and support made possible by more than 750,000 meters installed worldwide and over 30 years of flow and density measurement experience.

 [www.micromotion.com](http://www.micromotion.com)

© 2013 Micro Motion, Inc. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Micro Motion, ELITE, ProLink, MVD and MVD Direct Connect are marks of one of the Emerson Process Management family of companies. All other trademarks are property of their respective owners.

*Micro Motion supplies this publication for informational purposes only. While every effort has been made to ensure accuracy, this publication is not intended to make performance claims or process recommendations. Micro Motion does not warrant, guarantee, or assume any legal liability for the accuracy, completeness, timeliness, reliability, or usefulness of any information, product, or process described herein. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. For actual product information and recommendations, please contact your local Micro Motion representative.*

### Emerson Process Management

#### Micro Motion Americas

Worldwide Headquarters  
7070 Winchester Circle  
Boulder, Colorado USA 80301  
T: +1 800 522 6277  
T: +1 (303) 527 5200  
F: +1 (303) 530 8459  
Mexico T: 52 55 5809 5300  
Argentina T: 54 11 4837 7000  
Brazil T: 55 15 3413 8147  
Venezuela T: 58 26 1792 1858

### Emerson Process Management

#### Micro Motion Europe/Middle East

Central & Eastern Europe T: +41 41 7686 111  
Dubai T: +971 4 811 8100  
Abu Dhabi T: +971 2 697 2000  
France T: 0800 917 901  
Germany T: 0800 182 5347  
Italy T: 8008 77334  
The Netherlands T: +31 318 495 555  
Belgium T: +32 2 716 77 11  
Spain T: +34 913 586 000  
U.K. T: 0870 240 1978  
Russia/CIS T: +7 495 981 9811

### Emerson Process Management

#### Micro Motion Asia Pacific

Australia T: (61) 3 9721 0200  
China T: (86) 21 2892 9000  
India T: (91) 22 6662 0566  
Japan T: (81) 3 5769 6803  
South Korea T: (82) 2 3438 4600  
Singapore T: (65) 6 777 8211

**Micro Motion®**

  
**EMERSON™**  
Process Management