



PRODUCT DATASHEET

www.high-accuracy.com

Rosemount™ 140/141/142


Contacting Conductivity Sensors



Make reliable conductivity measurements with Rosemount 140 series conductivity sensors

Rosemount 140, 141, and 142 sensors are contacting conductivity sensors used for measuring electrolytic conductivity in applications ranging from high purity water to clean cooling water. These sensors are ideal for use in clean, non-corrosive water having conductivity less than about 20,000 $\mu\text{S}/\text{cm}$.

Overview

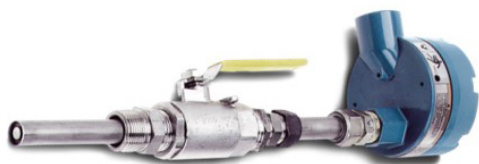

Retractable Rosemount 140

- Perform maintenance and replace sensors easily by removing the sensor from process piping without having to shut down and drain the line or vessel.
- Compatible with 1 in. full port ball valves (sold separately).



Versatile Rosemount 141 and 142

- ¾ in. MPT process connections for screw-in type installation.



Robust Sensor Construction

- High temperature options allow sensors to be used in process temperatures up to 200 °C.
- Easily wire sensors to transmitters through an integral cast aluminum junction box.

Contents

Overview	2	Dimensional and Installation Drawings	8
Ordering Information	3	Accessories	11
Specifications	5		

Ordering Information



The Rosemount 140 contacting conductivity sensor is a retractable type sensor used to measure conductivity in process liquids having moderately high conductivity. Sensors are available in 0.2/cm and 1.0/cm cell constants. Interconnecting cable and ball valve/retraction assembly must be ordered separately.

Table 1. Rosemount140 Contacting Conductivity Sensor ordering information

Model	Sensor type
140	Contacting Conductivity Sensor
Cell Constant and Temperature Construction	
54	0.2/cm cell constant – Standard temperature up to 150 °C
55	0.2/cm cell constant – High temperature up to 200 °C
56	1.0/cm cell constant – Standard temperature up to 150 °C
57	1.0/cm cell constant – High temperature up to 200 °C
Typical Model Number:140-56	



The Rosemount 141 contacting conductivity sensor is a screw in type sensor available with 0.2/cm and 1.0/cm cell constants. Interconnecting cable for wiring between sensor junction box and transmitter is sold separately.

Table 2. Rosemount141 Contacting Conductivity Sensor ordering information

Model	Sensor type
141	Contacting Conductivity Sensor
Cell constant	
04	0.2/cm cell constant
06	1.0/cm cell constant
Temperature construction	
13	Standard temperature up to 150 °C
14	High temperature up to 200 °C
RTD	
54	Pt-100
Typical model number:141-06-14-54	



The Rosemount 142 contacting conductivity sensor is a screw in type sensor available with 0.01/cm and 0.1/cm cell constants. Interconnecting cable for wiring between sensor junction box and transmitter is sold separately.

Table 3. Rosemount142 Contacting Conductivity Sensor ordering information

Model	Sensor type
142	Contacting Conductivity Sensor
Cell constant	
01	0.01/cm cell constant
03	0.1/cm cell constant
Temperature construction	
13	Standard temperature up to 150 °C
14	High temperature up to 200 °C
RTD	
54	Pt-100
Typical Model Number: 142-01-13-54	

Specifications

Table 4. Rosemount 140 contacting conductivity sensor specifications

Cell constants	
0.1 and 1.0/cm (nominal, to within +/- 5%)	
Wetted materials	
Electrodes	316 stainless steel
Body	316 stainless steel
Insulator	PEEK
O-rings	Viton
Temperature range	
Standard	32 °F to 302 °F (0 °C to 150 °C) maximum
High temperature	32 °F to 392 °F (0 °C to 200 °C) maximum
Pressure	
100 psig (791 kPa abs) maximum	
Maximum retraction pressure	
100 psig (791 kPa abs)	
Vacuum	
At 1.6 in. Hg (5.2 kPa) air leakage is less than 0.005 SCFM (0.00014 m ³ /min)	
Junction box	
Cast aluminum	
Process connection	
1 in. MPT through 1 inch full port ball valve (retractable)	
Weight/shipping weight	
5 lb /6 lb (2.5 kg / 3.0 kg) Weights rounded up to nearest whole lb or 0.5 kg	

Table 5. Rosemount 141 contacting conductivity sensor specifications

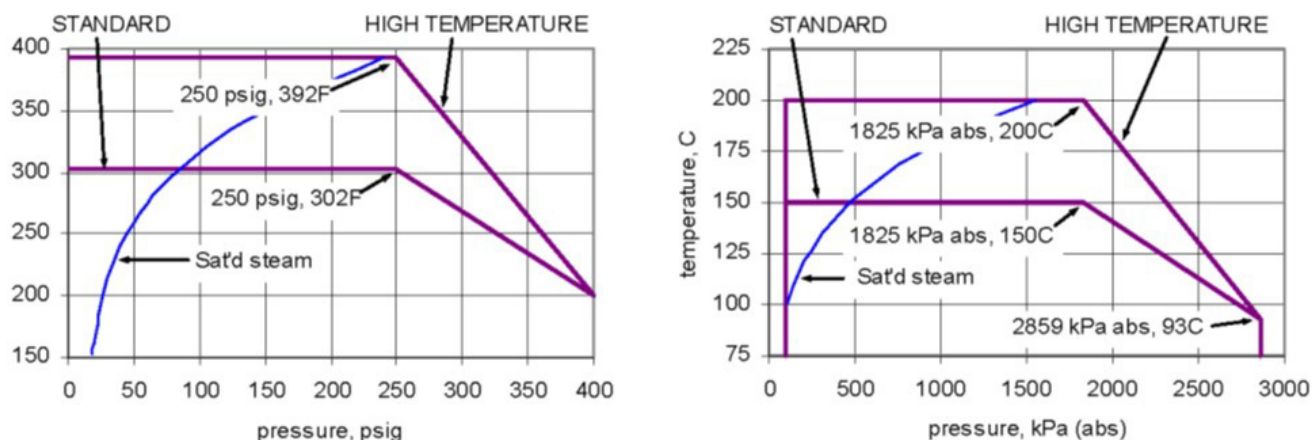
Cell constants	
0.2 and 1.0/cm (nominal, to within +/- 5%)	
Wetted materials	
Electrodes	316 stainless steel
Body	316 stainless steel
Insulator	PEEK
O-rings	Viton
Temperature and pressure	
See Figure 1 on page 7	
Vacuum	
At 1.6 in. Hg (5.2 kPa) air leakage is less than 0.005 SCFM (0.00014 m ³ /min)	
Junction box	
Cast aluminum	
Process connection	
¾ in. MPT	
Weight/shipping weight	
2 lb / 3 lb (1.0 kg / 1.5 kg) Weights rounded up to nearest whole lb or 0.5 kg	

Table 6. Rosemount 142 contacting conductivity sensor specifications

Wetted materials	
Electrodes	316 stainless steel
Body	316 stainless steel
Insulator	PEEK (high temperature option)
	PCTFE (low temperature option)
O-rings	Viton
Temperature and pressure	
See Figure 1 on page 7	
Vacuum	
At 1.6 in. Hg (5.2 kPa) air leakage is less than 0.005 SCFM (0.00014 m ³ /min)	
Junction box	
Cast aluminum	
Process connection	
¾ in. MPT	
Weight/shipping weight	
2 lb / 3 lb (1.0 kg / 1.5 kg) Weights rounded up to nearest whole lb or 0.5 kg	

Table 7. Specifications for Ball Valve Kit PN 23724-00

Wetted Materials
316 stainless steel except Teflon® seat and seals in ball valve

Figure 1. Rosemount 141 and 142 sensor pressure/temperature graphs

Dimensional and Installation Drawings

Figure 2. Rosemount 140 sensor dimensional drawing

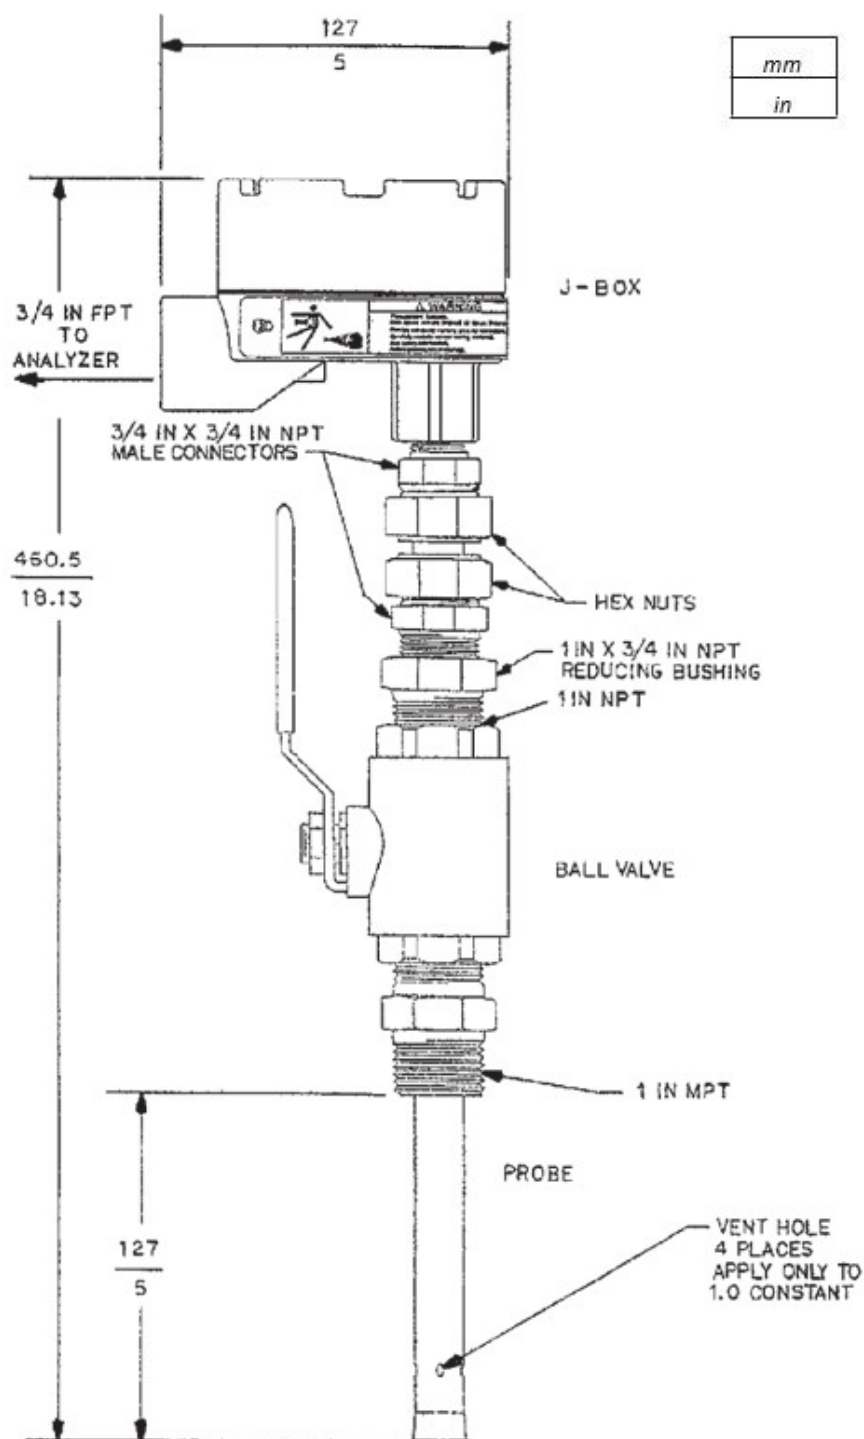


Figure 3. Rosemount 141 sensor dimensional drawing

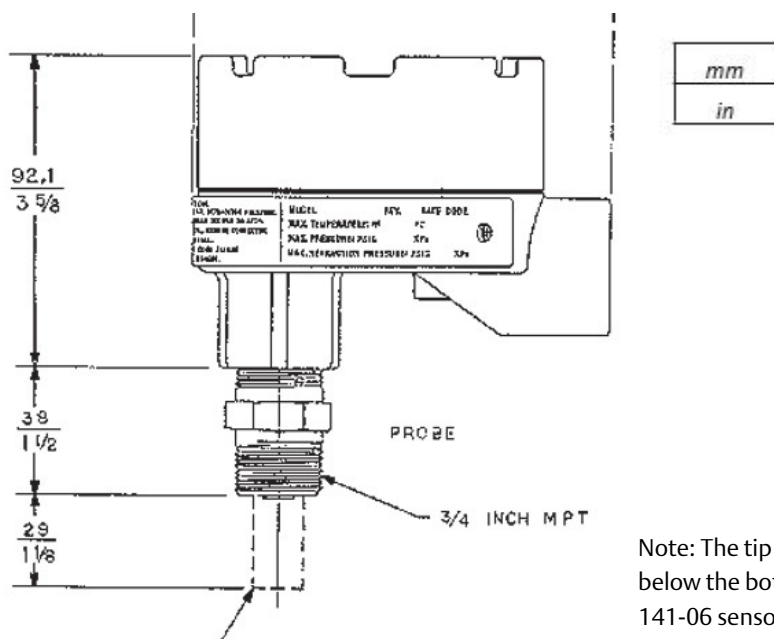


Figure 4. Rosemount 142 sensor dimensional drawing

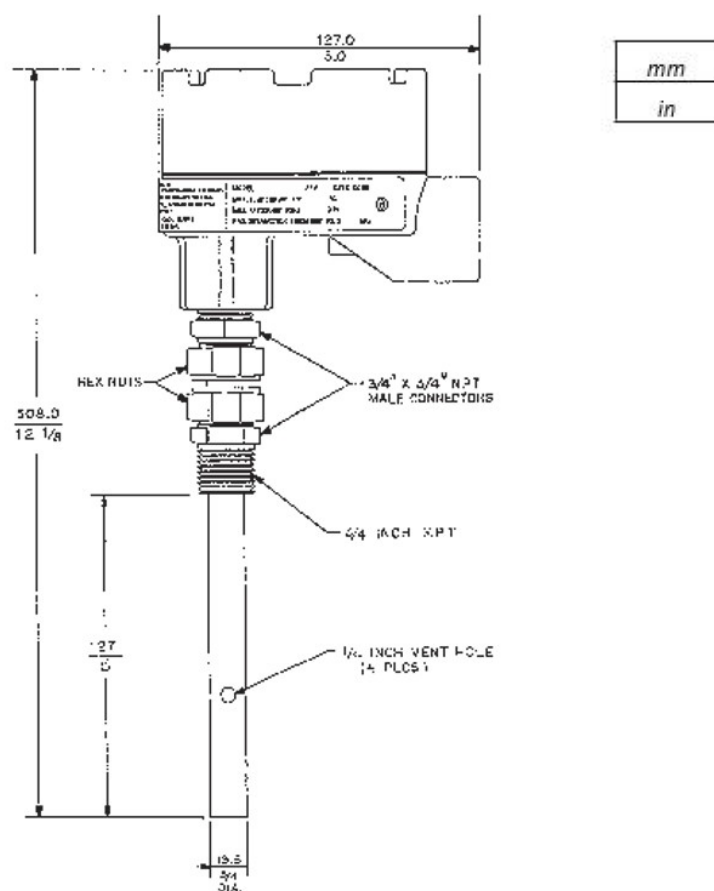


Figure 5. Installation details for Rosemount 140 sensor

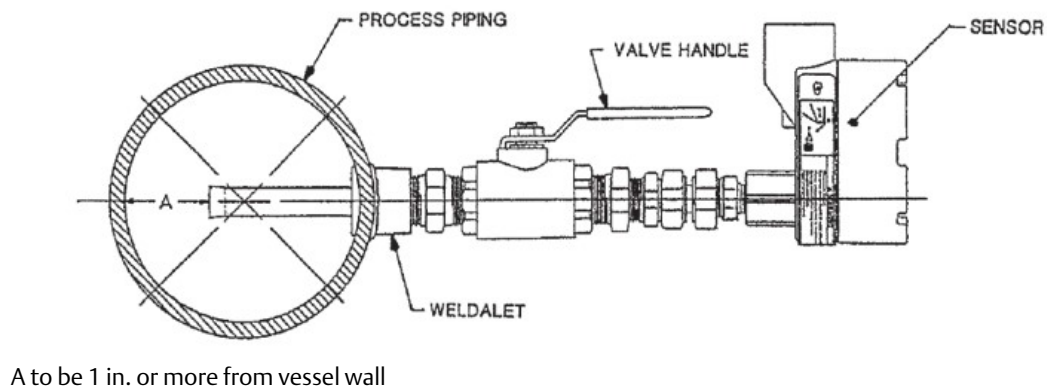


Figure 6. Installation details for Rosemount 141 sensor


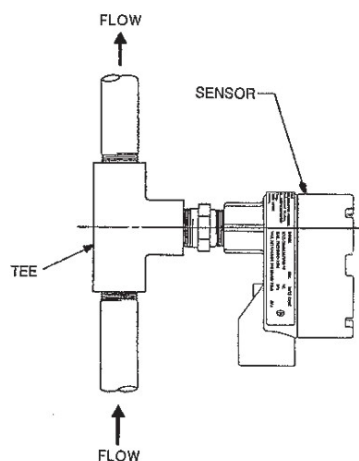


Figure 7. Installation details for Rosemount 142 sensor

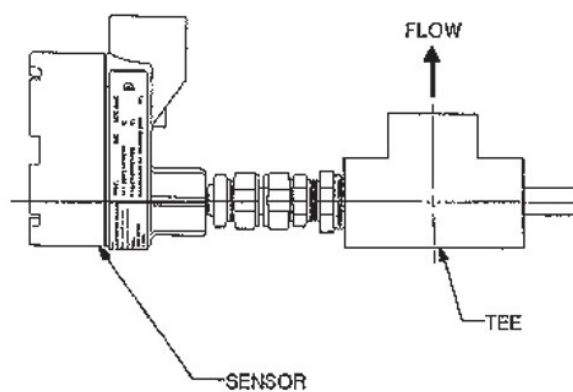

Accessories

Table 8. Rosemount 140/141/142 Sensor accessories information

Part number	Description
23550-00	Junction box for remote cable connection
9200275	Connecting cable, unterminated, specify length
23747-00	Connecting cable, terminated, specify length
05010781899	Conductivity standard SS-6, 200 $\mu\text{S}/\text{cm}$, 32 oz. (0.95 L)
05010797875	Conductivity standard SS-6A, 200 $\mu\text{S}/\text{cm}$, 1 gal (3.78 L)
05010782468	Conductivity standard SS-5, 1000 $\mu\text{S}/\text{cm}$, 32 oz (0.95 L)
05010783002	Conductivity standard SS-5A, 1000 $\mu\text{S}/\text{cm}$, 1 gal (3.78 L)
05000705464	Conductivity standard SS-1, 1409 $\mu\text{S}/\text{cm}$, 32 oz (0.95 L)
05000709672	Conductivity standard SS-1A, 1409 $\mu\text{S}/\text{cm}$, 1 gal (3.78 L)
05010782147	Conductivity standard SS-7, 5000 $\mu\text{S}/\text{cm}$, 32 oz (0.95 L)
05010782026	Conductivity standard SS-7A, 5000 $\mu\text{S}/\text{cm}$, 1 gal (3.78 L)

Table 9. Rosemount 140 Sensor accessories information

Part number	Description
23724-00	Ball valve kit
23730-00	Process compression fitting, $\frac{3}{4}$ in. NPT
23731-00	Process fitting rebuild kit
9310120	Junction box compression fitting
9550200	O-ring® 2-116, Viton®

Figure 8. Rosemount 140 with Ball Valve Kit (PN 23724-00)

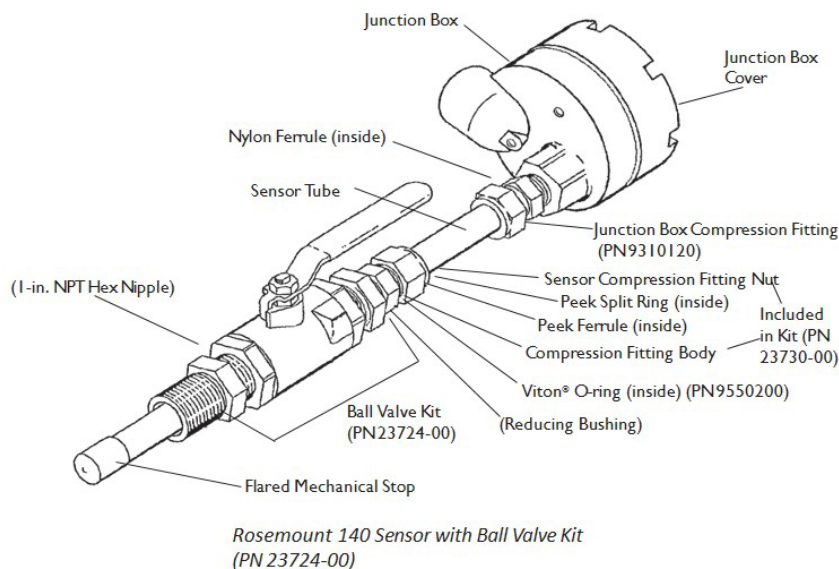


Table 10. Rosemount 142 Sensor accessories information

Part number	Description
33107-01	Compression fitting, 3/4 in.
9310063	Ferrule, 3/4 in.
9310066	Compression nut, 3/4 in.

Notes:

Notes:

Notes:

HA HIGH ACCURACY

m e a s u r e m e n t i n s t r u m e n t s

Our offering:

	Pressure Measurement		Level Measurement
	Temperature Measurement		Flow Measurement
	Marine Measurement & Analytical		Gas Analysis
	Liquid Analysis		Flame and Gas Detection
	Tank Gauging		Wireless Infrastructure
	Acoustic & Discrete		

www.high-accuracy.com

Global Headquarters

Emerson Automation Solutions

8200 Market Blvd

Chanhassen, MN 55317

 +1 800 999 9307 or +1 952 906 8888

 +1 952 949 7001

 Liquid.CSC@Emerson.com

North America Regional Office

Emerson Automation Solutions

8200 Market Blvd.

Chanhassen, MN 55317, USA

 +1 800 999 9307 or +1 952 906 8888

 +1 952 949 7001

 RMT-NA.RCCRFQ@Emerson.com

Latin America Regional Office

Emerson Automation Solutions

1300 Concord Terrace, Suite 400

Sunrise, FL 33323, USA

 +1 954 846 5030

 +1 954 846 5121

 RFQ.RMD-RCC@Emerson.com

Europe Regional Office

Emerson Automation Solutions GmbH

Neuhofstrasse 19a P.O. Box 1046

CH 6340 Baar

Switzerland

 +41 (0) 41 768 6111

 +41 (0) 41 768 6300

 RFQ.RMD-RCC@Emerson.com

Asia Pacific Regional Office

Emerson Automation Solutions Asia Pacific Pte Ltd

1 Pandan Crescent

Singapore 128461

 +65 6777 8211

 +65 6777 0947

 Enquiries@AP.Emerson.com

Middle East and Africa Regional Office

Emerson Automation Solutions

Emerson FZE P.O. Box 17033,

Jebel Ali Free Zone - South 2

Dubai, United Arab Emirates

 +971 4 8118100

 +971 4 8865465

 RFQ.RMTMEA@Emerson.com



Analyticexpert.com



Linkedin.com/company/Emerson-Automation-Solutions



Twitter.com/Rosemount_News



Facebook.com/Rosemount



Youtube.com/user/RosemountMeasurement



Google.com/+RosemountMeasurement

The Emerson logo is a trademark and service mark of Emerson Electric Co.
Rosemount and Rosemount logotype are trademarks of Emerson.
All other marks are the property of their respective owners.
© 2017 Emerson. All rights reserved.