



HIGH ACCURACY

m e a s u r e m e n t i n s t r u m e n t s

PRODUCT DATASHEET

www.high-accuracy.com

Rosemount™ 402 and 402VP

Contacting Conductivity Sensors



Reliable conductivity measurements for your process

With Rosemount 402 and 402VP contacting conductivity sensors, you will be able to accurately measure electrolytic conductivity in a broad range of applications from high purity water to clean cooling water. The Rosemount 402 and 402VP contacting conductivity sensors are ideal for use in clean, non-corrosive liquid having conductivity less than 20,000 $\mu\text{S}/\text{cm}$.

Overview



Minimize Start-up and Installation Time

- A factory-measured cell constant ensures out-of-the-box accuracy and no initial calibration requirements.
- Available in cell constants of 0.01, 0.1, and 1.0/cm.

Meet Your Process Mounting Needs

- The sensors are designed to be retracted through a 1¼ in. ball valve assembly (sold separately).
- Sensors may be removed from process piping without having to shutdown or drain the line.
- Offered with Variopol (VP6) quick disconnect fitting.

A Robust Two-electrode Design

- The sensors have concentric titanium electrodes separated by a PEEK insulator.
- An EPDM O-ring seals the internal parts of the sensor from the process liquid.
- Maximum operating temperature up to 100 °C.
- Maximum pressure rating up to 200 psig.

Contents

Overview	2	Dimensional Drawings	7
Ordering Information	3	Accessories	10
Specifications	5	Engineering Specifications	11

Ordering Information



The Rosemount 402 Contacting Conductivity sensor is intended to measure electrolytic conductivity in clean water applications. These sensors can be configured with either a 0.01/cm, 0.1/cm, or 1.0/cm to accommodate varying levels of conductivity. The sensors are available with either an integral cable connection (402) or Variopol (VP6) connector (402VP). Variopol cables sold separately (see accessories).

Additional Information

Specifications: see “Specifications” on page 5

Dimensional drawings: see “Dimensional Drawings” on page 7

Accessories: see “Accessories” on page 10

Engineering Specifications: see “Engineering Specifications” on page 11

Table 1. Rosemount 402 Contacting Conductivity Sensor ordering information

Model	Sensor type
402	Contacting Conductivity Sensor
Cell constant	
11	0.01/cm
12	0.1/cm
13	1.0/cm
Temperature compensation	
_	Pt-1000 ⁽¹⁾
54	Pt-100
55	10K Ohm TC
Option 1	
_	No selection
31	Retraction assembly kit ⁽²⁾
Option 2	
_	No selection
60	Integral junction box ⁽³⁾
Option 3	
_	No selection
61	Sensor cable terminated for use with sensor junction box ⁽³⁾
Typical Model Number: 402-11-_-60-61	

1. Recommended for use with Rosemount transmitters 1056, 56, 1057, 1066, and 5081.
2. Assembly contains nipple, ball valve, and retraction body.
3. Interconnecting cable between the junction box and transmitter must be purchased as a separate item.

Table 2. Rosemount 402VP Contacting Conductivity Sensor with Variopol cable connection ordering information

Model	Sensor type
402VP	Contacting Conductivity Sensor
Cell constant	
11	0.01/cm
12	0.1/cm
13	1.0/cm
Temperature compensation	
_	Pt-1000 ⁽¹⁾
54	Pt-100
55	10K Ohm TC
Options	
_	No selection
31	Retraction assembly kit ⁽²⁾
Typical Model Number: 402VP-11-_-31	

1. Recommended for use with Rosemount transmitters 1056, 56, 1057, 1066 and 5081,
2. Assembly contains nipple, ball valve, and retraction body.

Specifications

Table 3. Rosemount 402/402VP Contacting Conductivity Sensor specifications

Wetted materials	
Electrodes	Titanium
Insulator	Glass Filled PEEK
Sensor tube	316 Stainless Steel
O-ring	EPDM
Washer	Neoprene
Temperature range	
Standard	32 to 212 °F (0 to 100 °C)
Maximum pressure	
200 psig (1481 kPa abs)	
Maximum retraction pressure	
64 psig (542 kPa abs)	
Vacuum	
At 1.6 in. Hg (5.2 kPa) air leakage is less than 0.005 SCFM (0.00014 m ³ /min)	
Cell constants	
0.01, 0.1, and 1.0/cm	
Process connection	
Sensor is inserted through 1¼ in. NPT full port ball valve	
Cable	
10 ft (3.1 m) standard; for longer cable lengths, choose option -60 (integral junction box) and order interconnecting cable separately; 402VP Interconnecting VP6 cables sold separately (See Accessories).	

Table 4. Rosemount 402/402VP weights and shipping weights*

Model	With 10 ft. (3.1 m) cable		With junction box	
	Weight	Shipping Weight	Weight	Shipping Weight
Rosemount 402 Contacting Conductivity Sensor	3 lb. (1.5 kg)	4 lb. (2.0 kg)	4 lb. (2.0 kg)	5 lb. (2.5 kg)
Rosemount 402VP Contacting Conductivity Sensor	3 lb. (1.5 kg)	4 lb. (2.0 kg)		


* Rounded up to the nearest 1 lb or 0.5 kg.

Retraction Assembly Specifications

Assembly includes	
Ball valve, retraction body, and pipe nipple.	
Wetted materials	
Ball valve	316 Stainless Steel with Teflon seals and seat steel
Nipple	316 Stainless Steel
Packing rings	Graphite
Packing bushing	303 Stainless Steel
Retraction body	316 Stainless Steel
Process connection	
Ball valve 1 ¼ in. FNPT; Nipple 1 ¼ in. MNPT	
Temperature	
32 to 212 °F (0 to 100 °C)	
Pressure	
200 psig (1481 kPa abs) maximum	
Maximum retraction pressure	
64 psig (542 kPa abs) maximum	
Vacuum	
At 1.6 in. Hg (5.2 kPa) air leakage is less than 0.005 SCFM (0.00014 m ³ /min)	


Dimensional Drawings

Figure 1. Rosemount 402 dimensional drawing

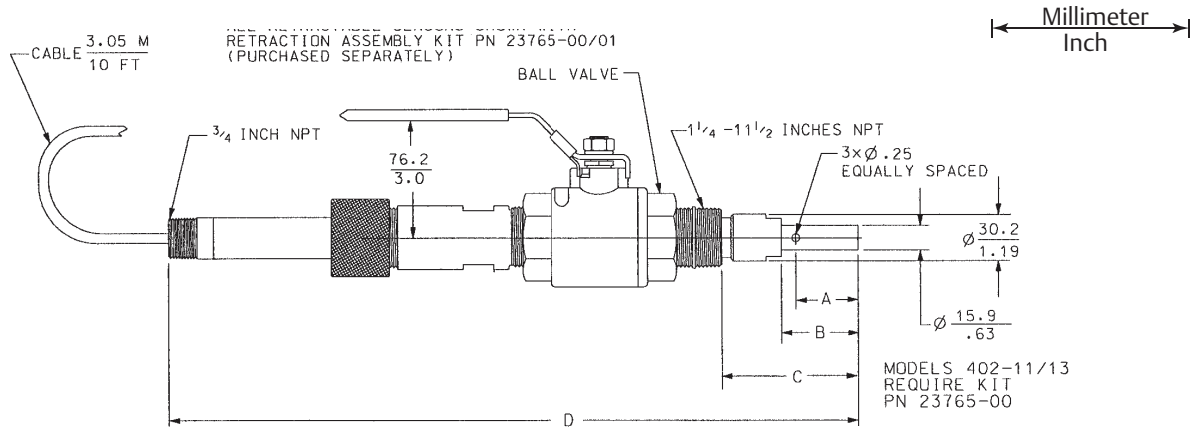


MODEL	RETRACTION ASSY KIT	A		B		C (MIN - MAX)		D	
		INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
402-11	23765-00	1.59	40.4	1.98	50.3	3.21-5.34	82-136	18.13	460.5
402-12	23765-00	.687	17.4	1.11	28.2	2.34-4.47	59-114	17.33	440.2
402-13	23765-00	.667	16.9	1.13	28.7	2.36-4.49	60-114	17.33	440.2

Figure 2. Rosemount 402 with integral junction box (option-60) dimensional drawing

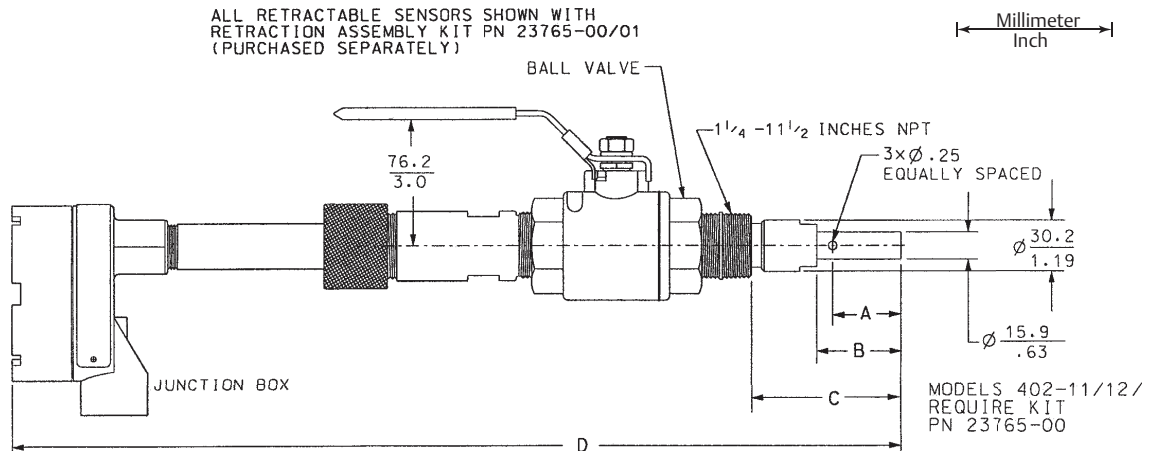


MODEL	RETRACTION ASSY KIT	A		B		C (MIN - MAX)		D	
		INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
402-11	23765-00	1.59	40.4	1.98	50.3	3.21-5.34	82-136	21.1	537
402-12	23765-00	.687	17.4	1.11	28.2	2.34-4.47	59-114	20.3	515
402-13	23765-00	.667	16.9	1.13	28.7	2.36-4.49	60-114	20.3	515

Figure 3. Rosemount 402VP dimensional drawing

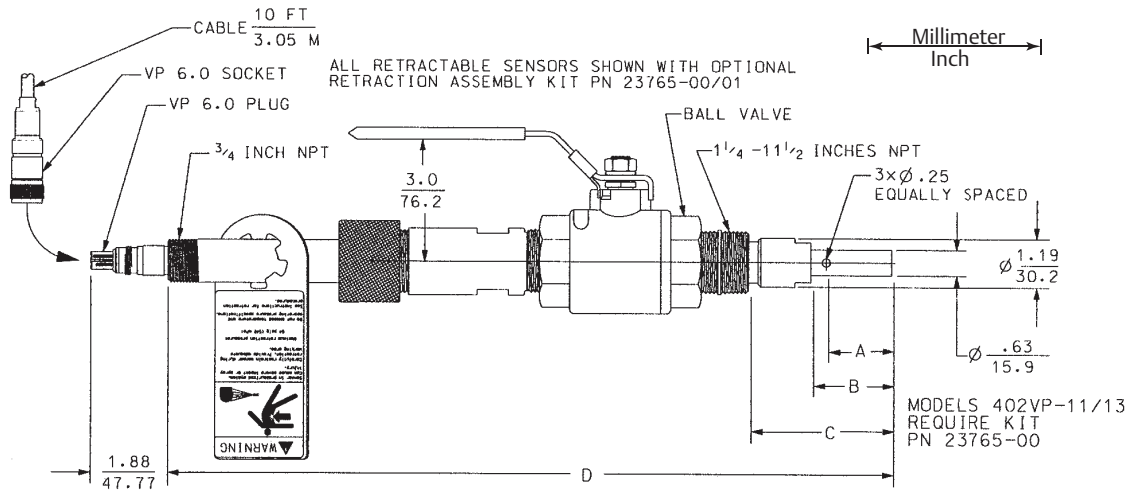


MODEL	RETRACTION ASSY KIT	A		B		C (MIN - MAX)		D	
		INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
402-11	23765-00	1.59	40.4	1.98	50.3	3.21-5.34	82-136	18.13	460.5
402-12	23765-00	.687	17.4	1.11	28.2	2.34-4.47	59-114	17.33	440.2
402-13	23765-00	.667	16.9	1.13	28.7	2.36-4.49	60-114	17.33	440.2

Figure 4. Rosemount 402 with integral junction box installation details

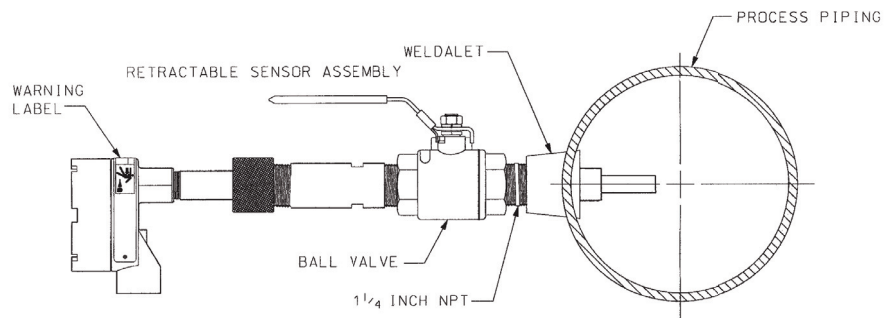

Rosemount 402 Retractable Sensor Installed In a Large Pipe or Tank


The Endurance Retractable Sensor can be attached through a weldolet in either a large pipe or tank.

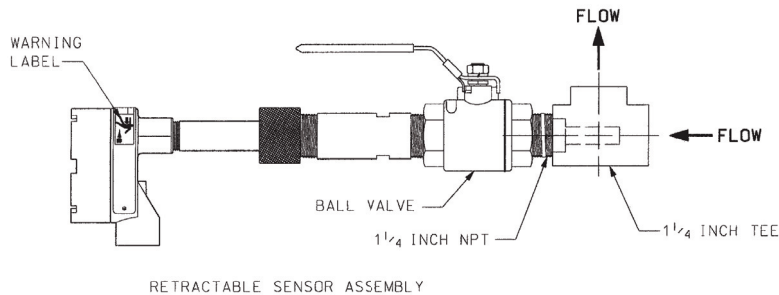

Rosemount 402 Retractable Sensor Installed In a Standard Tee


For best performance, orient the sensor with the end facing the liquid flow.

Figure 5. Rosemount 402VP installation details

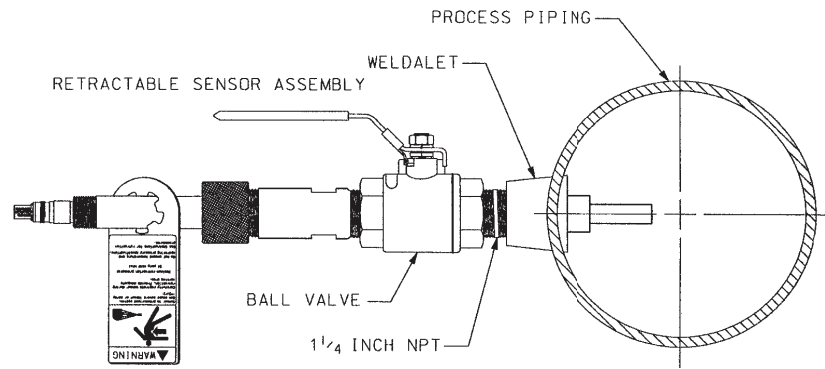

402VP Retractable Sensor Installed in a Large Pipe or Tank

The ENDURANCE Retractable Sensor can be attached through a weldolet in either a large pipe or tank.

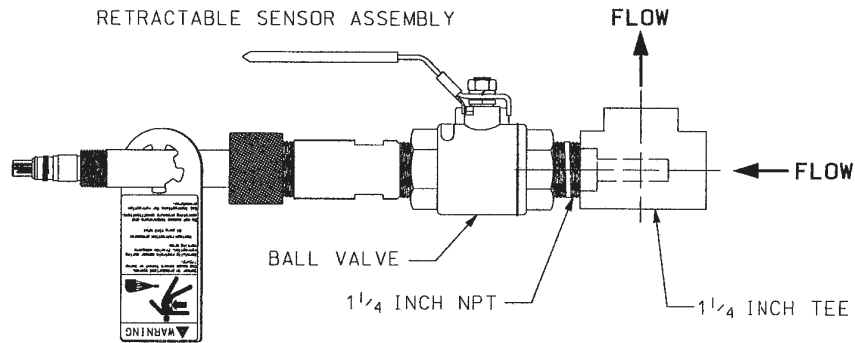

402VP Retractable Sensor Installed in a Standard Tee

For best performance, orient the sensor with the end facing the liquid flow.

Accessories

Table 5. Rosemount 402/402VP Contacting Conductivity Sensor accessories information

Part number	Description
23550-00	Remote junction box without preamplifier
23747-00	Interconnect cable, prepped (must specify length)
9200275	Extension cable, unprepped (must specify length)
23765-00	Retraction assembly kit (includes nipple, ball valve, and retraction body)
23796-00	Retraction Body
9340078	1¼ in. NPT Full Port Ball Valve
05010781899	Conductivity standard SS-6, 200 µS/cm, 32 oz (0.95 L)
05010797875	Conductivity standard SS-6A, 200 µS/cm, 1 gal (3.78 L)
05010782468	Conductivity standard SS-5, 100k0 µS/cm, 32 oz (0.95 L)
05010783002	Conductivity standard SS-5A, 1000 µS/cm, 1 gal (3.78 L)
05000705464	Conductivity standard SS-1, 1409 µS/cm, 32 oz (0.95 L)
05000709672	Conductivity standard SS-1A, 1409 µS/cm, 1 gal (3.78 L)
05010782147	Conductivity standard SS-7, 5000 µS/cm, 32 oz (0.95 L)
05010782026	Conductivity standard SS-7A, 5000 µS/cm, 1 gal (3.78 L)
23747-06	2.5 ft (0.8 m) Interconnecting VP6 Cable
23747-04	6.4 ft (1.2 m) Interconnecting VP6 Cable
23747-02	10 ft (3.0 m) Interconnecting VP6 Cable
23747-07	15 ft (4.6 m) Interconnecting VP6 Cable
23747-08	20 ft (6.1 m) Interconnecting VP6 Cable
23747-09	25 ft (7.6 m) Interconnecting VP6 Cable
23747-10	30 ft (9.1 m) Interconnecting VP6 Cable
23747-03	50 ft (15.2 m) Interconnecting VP6 Cable
23747-11	100 ft (30.5 m) Interconnecting VP6 Cable

Engineering Specifications

Cell constants 0.01, 0.1, and 1.0/cm













- The sensor shall be suitable for the determination of electrolytic conductivity in clean, noncorrosive samples where the ability to remove the sensor from the process piping or tank without shutting down or draining lines or equipment is desired.
- The sensor shall be supplied with a retraction assembly and full port ball valve. The ball valve shall be connected to the piping or tank using a 1¼ in. close nipple.
- The sensor shall incorporate titanium electrodes and a PEEK insulator.
- The sensor shall have an integral platinum RTD for temperature measurement.
- The sensor insertion tube shall be 316 stainless steel.
- The ball valve shall be 316 stainless steel with Teflon seals and seats.
- The retraction body shall be 316 stainless steel and shall use three graphite packing rings to seal the sensor tube.
- The maximum temperature for the sensor shall be 212 °F (100 °C) at 200 psig (1481 kPa abs).
- The maximum retraction pressure shall be 64 psig (542 kPa abs).
- The sensor shall be suitable for vacuum service as low as 1.6 in Hg (5.2 kPa).
- The sensor shall be available with integral cable, integral junction box, or a Variopol quick disconnect fitting.
- The sensor shall be Rosemount 402 (integral cable) or 402VP (Variopol fitting) or approved equal.



HIGH ACCURACY

measurement instruments

Our offering:

	<p>Pressure Measurement</p>		<p>Level Measurement</p>
	<p>Temperature Measurement</p>		<p>Flow Measurement</p>
	<p>Marine Measurement & Analytical</p>		<p>Gas Analysis</p>
	<p>Liquid Analysis</p>		<p>Flame and Gas Detection</p>
	<p>Tank Gauging</p>		<p>Wireless Infrastructure</p>
	<p>Acoustic & Discrete</p>		

www.high-accuracy.com

Global Headquarters

Emerson Automation Solutions

8200 Market Blvd
Chanhassen, MN 55317
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
Liquid.CSC@Emerson.com

North America Regional Office

Emerson Automation Solutions

8200 Market Blvd.
Chanhassen, MN 55317, USA
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
RMT-NA.RCCRFQ@Emerson.com

Latin America Regional Office

Emerson Automation Solutions

1300 Concord Terrace, Suite 400
Sunrise, FL 33323, USA
+1 954 846 5030
+1 954 846 5121
RFQ.RMD-RCC@Emerson.com

Europe Regional Office

Emerson Automation Solutions GmbH

Neuhofstrasse 19a P.O. Box 1046
CH 6340 Baar
Switzerland
+41 (0) 41 768 6111
+41 (0) 41 768 6300
RFQ.RMD-RCC@Emerson.com

Asia Pacific Regional Office

Emerson Automation Solutions Asia Pacific Pte Ltd

1 Pandan Crescent
Singapore 128461
+65 6777 8211
+65 6777 0947
Enquiries@AP.Emerson.com

Middle East and Africa Regional Office

Emerson Automation Solutions

Emerson FZE P.O. Box 17033,
Jebel Ali Free Zone - South 2
Dubai, United Arab Emirates
+971 4 8118100
+971 4 8865465
RFQ.RMTMEA@Emerson.com



Analyticexpert.com



Linkedin.com/company/Emerson-Automation-Solutions



Twitter.com/Rosemount_News



Facebook.com/Rosemount



Youtube.com/user/RosemountMeasurement



Google.com/+RosemountMeasurement

The Emerson logo is a trademark and service mark of Emerson Electric Co.
Rosemount and Rosemount logotype are trademarks of Emerson.
All other marks are the property of their respective owners.
© 2017 Emerson. All rights reserved.