



**HIGH ACCURACY**

m e a s u r e m e n t i n s t r u m e n t s

## PRODUCT DATASHEET

[www.high-accuracy.com](http://www.high-accuracy.com)

**Product Data Sheet**

SD 8613-2E03

November 2010

# **Damcos® Skotten Bulkhead Cable Fittings**

**DAMCOS®**

---

  
**EMERSON**  
Process Management

# Damcos® Skotten Bulkhead

## Description

The Skotten bulkhead fittings is used for cabling transducer cables through tank sides without causing any leakage.

The tightness of a tank is of greatest importance and thorough tests have proved that the skotten bulkhead fittings meet even the strictest requirements.

The rubber bushing is compressed between two washers stabilizing the bushing and protecting it from open fire.

The Skotten bulkhead fitting is type approved by DNV for cable penetration in bulkheads or decks limited to a pressure of 16 bar and between gas safe and gas dangerous areas.

Type Approval Programme 8-471.19-1 - Water and gas tightness test.

## Material


The Skotten bulkhead fitting consists of an outer sleeve, a nut, washers and a rubber bushing

Type:	8-1009
Socket:	Steel SIS 2172
Nut:	Brass
Washer:	Galvanized steel
Rubber bushing:	Oil and seawater resistant chloroprene rubber.
Standard hardness:	70° shore

Type:	165B0322
Socket:	Stainless steel 2343
Nut:	Stainless steel 2343
Washer:	Stainless steel 2343
Rubber bushing:	Oil and seawater resistant chloroprene rubber.
Standard hardness:	70° shore

# Damcos® Skotten Bulkhead

## Dimensions

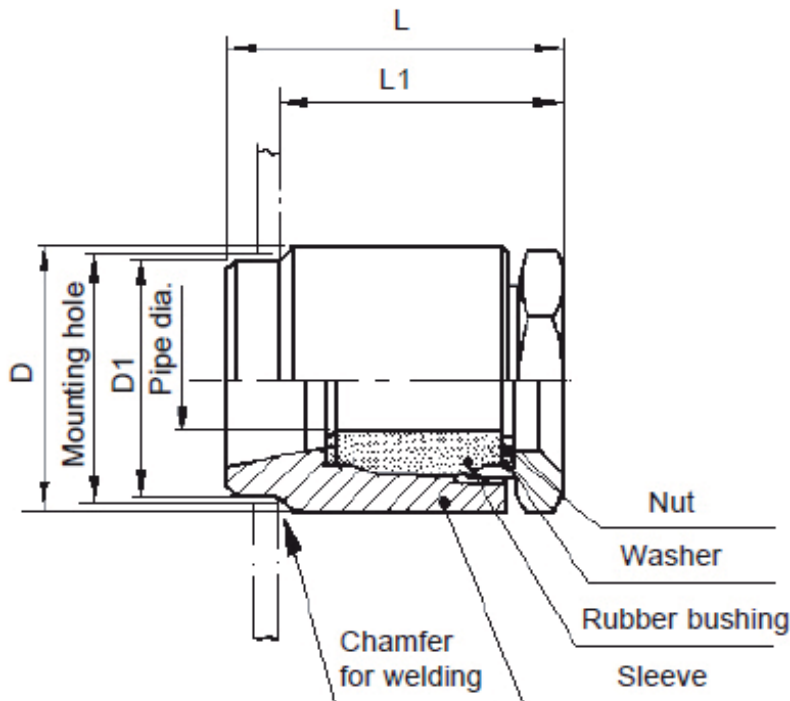

Size	Pipe dia.	D	D1	L	L1	Mounting hole
1009	9	50	45	65	55	47

## Maritime approvals

Det Norske Veritas

For use as a pipe penetration of class A-0 and water tight up to a pressure of max. 35 bar.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Damcos and the Damcos logotype are registered trademarks of Damcos A/S. All rights reserved. The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs and specifications of our products at any time without notice. Damcos A/S accepts no responsibility for any errors that may appear in this publication.

This product is developed and managed by:  
Emerson Process Management

Damcos A/S  
Aaderupvej 41  
DK-4700 Naestved  
T +45 5578 7200  
F +45 5578 7272

For global contacts:  
[www.EmersonProcess.com/mtm](http://www.EmersonProcess.com/mtm)

















# HIGH ACCURACY

measurement instruments

Our offering:

	<p>Pressure Measurement</p>		<p>Level Measurement</p>
	<p>Temperature Measurement</p>		<p>Flow Measurement</p>
	<p>Marine Measurement &amp; Analytical</p>		<p>Gas Analysis</p>
	<p>Liquid Analysis</p>		<p>Flame and Gas Detection</p>
	<p>Tank Gauging</p>		<p>Wireless Infrastructure</p>
	<p>Acoustic &amp; Discrete</p>		

[www.high-accuracy.com](http://www.high-accuracy.com)